




7400 SFA 4x2

Sales Proposal For:
TOWN OF PELHAM

Presented By:
LIBERTY INT'L TRKS OF NH

Prepared For:
TOWN OF PELHAM
Frank Ferreira
6 Village Grn
Pelham, NH 03076-3172
(603)635 - 8526

Presented By:
LIBERTY INT'L TRKS OF NH
James C Ramsay
1400 S. WILLOW STREET
MANCHESTER NH 03103 -
(603)623-8873

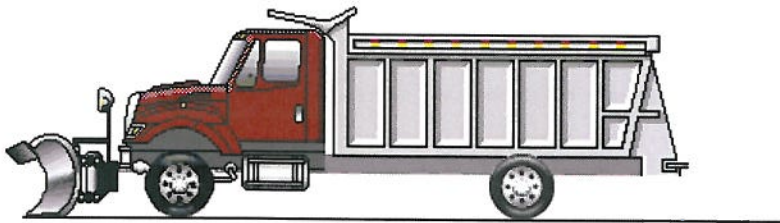

Model Profile
2017 7400 SFA 4X2 (SA525)

MISSION:	Requested GVWR: 39000. Calc. GVWR: 37780
DIMENSION:	Wheelbase: 177.00, CA: 102.00, Axle to Frame: 63.00
ENGINE, DIESEL:	{Navistar N9} EPA 2010, SCR, 300 HP @ 2000 RPM, 860 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed, 300 Peak HP (MAX)
TRANSMISSION, AUTOMATIC:	{Allison 3500_RDS_P} 5th Generation Controls; Wide Ratio, 5-Speed, With Overdrive; On/Off Hwy; Includes Oil Level Sensor, With PTO Provision, Less Retarder, With 80,000-lb GVW & GCW Max.
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-18-133A} Wide Track, I-Beam Type, 18,000-lb Capacity
AXLE, REAR, SINGLE:	{Meritor RS-23-160} Single Reduction, 23,000-lb Capacity, 200 Wheel Ends, Driver Controlled Locking Differential Gear Ratio: 5.38
CAB:	Conventional
TIRE, FRONT:	(2) 12R22.5 G661 HSA (GOODYEAR) 484 rev/mile, load range H, 16 ply
TIRE, REAR:	(4) 12R22.5 G282 MSD (GOODYEAR) 481 rev/mile, load range H, 16 ply
SUSPENSION, RR, SPRING, SINGLE:	Vari-Rate; 31,000-lb Capacity, Includes 4500-lb Capacity Multileaf Auxiliary
PAINT:	Cab schematic 100GM Location 1: 2303, Red (Std) Chassis schematic N/A

<u>Code</u>	<u>Description</u>
SA52500	Base Chassis, Model 7400 SFA 4X2 with 177.00 Wheelbase, 102.00 CA, and 63.00 Axle to Frame.
1CAJ	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.866" x 3.622" x 0.433" (276.0mm x 92.0mm x 11.1mm); 456.0" (11582mm) Maximum OAL
1LLA	BUMPER, FRONT Steel, Swept Back <u>Includes</u> : BUMPER, FRONT Powder Coated Gray (Argent) Color
1WDS	FRAME EXTENSION, FRONT Integral; 20" In Front of Grille
1WEV	WHEELBASE RANGE 146" (370cm) Through and Including 195" (495cm)
2ARZ	AXLE, FRONT NON-DRIVING {Meritor MFS-18-133A} Wide Track, I-Beam Type, 18,000-lb Capacity <u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.
3ACR	SUSPENSION, FRONT, SPRING Multileaf, Shackle Type; 18,000-lb Capacity; Less Shock Absorbers <u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free <u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.
3WAJ	SPRINGS, FRONT AUXILIARY Air Bag, Right Side Only, Driver Control
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications <u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE Bendix On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SLACK ADJUSTERS, FRONT Automatic : SLACK ADJUSTERS, REAR Automatic : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4 <u>Notes</u> : Rear Axle is Limited to 23,000-lb GAWR with Code 04091 BRAKE SYSTEM, AIR and Standard Rear Air Cam Brakes Regardless of Axle/Suspension Ordered.
4193	BRAKES, FRONT, AIR CAM 16.5" x 6", Includes 24 Sqn Long Stroke Brake Chambers <u>Notes</u>

<u>Code</u>	<u>Description</u>
	: The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.
4732	DRAIN VALVE {Berg} Manual; With Pull Chain, for Air Tank
	<u>Includes</u> : DRAIN VALVE Mounted in Wet Tank
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} Full Vehicle Wheel Control System (4-Channel)
4EBD	AIR DRYER {Meritor Wabco System Saver 1200} with Heater
	<u>Includes</u> : AIR DRYER LOCATION Inside Left Rail, Back of Cab
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 Spring Brake
4EXV	BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 SqIn
4NDB	BRAKES, REAR, AIR CAM S-Cam; 16.5" x 7.0"; Includes 30/30 Sq.In. Long Stroke Brake Chamber and Spring Actuated Parking Brake
	<u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.
4SBC	AIR COMPRESSOR {Bendix Tu-Flo 550} 13.2 CFM Capacity
5710	STEERING COLUMN Tilting and Telescoping
5CAN	STEERING WHEEL 2-Spoke; 18" Diam., Black, Leather Wrapped
5PTB	STEERING GEAR (2) {Sheppard M-100/M-80} Dual Power
7BEP	EXHAUST SYSTEM Switchback Horizontal Aftertreatment Device, Frame Mounted Right Side Under Cab; Includes Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab
7SDL	ENGINE COMPRESSION BRAKE for Navistar N9/10 I6 Engines; Electronically Activated
7WBS	MUFFLER/TAIL PIPE GUARD (1) Bright Stainless Steel
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment
	<u>Includes</u> : DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab : FUSES, ELECTRICAL SAE Blade-Type : HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever : HEADLIGHTS (2) Sealed Beam, Round, with Chrome Plated Bezels : JUMP START STUD Located on Positive Terminal of Outermost Battery : PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light : RUNNING LIGHT (2) Daytime, Included With Headlights : STARTER SWITCH Electric, Key Operated

<u>Code</u>	<u>Description</u>
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
	: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted
	: WIRING, CHASSIS Color Coded and Continuously Numbered
8518	CIGAR LIGHTER Includes Ash Cup
8695	SNOW SHIELD (2) Chrome; for Dual Air Horns
8GHP	ALTERNATOR {Delco Remy 28SI} Brush Type, 12 Volt 160 Amp. Capacity, Pad Mount, with Remote Voltage Sensor
8HAB	BODY BUILDER WIRING Back of Standard Cab at Left Frame or Under Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/ Accessory Power/Ground and Sealed Connector for Stop/Turn
8HAG	ELECTRIC TRAILER BRAKE/LIGHTS Accommodation Package to Rear of Frame; for Separate Trailer Stop, Tail, Turn, Marker Light Circuits; Includes Electric Trailer Brake accommodation package With Cab Connections for Mounting Customer Installed Electric Brake Unit, Less Trailer Socket
8MKX	BATTERY SYSTEM {International} Maintenance-Free (3) 12-Volt 2775CCA Total
8NAA	TAIL LIGHT WIRING MODIFIED Includes: Wiring for Standard Lt & Rt Tail Lights; Separate 8.0' of Extra Cable Wiring for Lt & Rt Body Mounted Tail Lights
8RCB	CB RADIO Accommodation Package; Header Mounted; Feeds From Accessory Side of Ignition Switch; Includes Power Source and Two Antenna Bases With Wiring
	<u>Notes</u>
	: NOT INCLUDED: Antenna
8RGA	2-WAY RADIO Wiring Effects; Wiring With 20 Amp Fuse Protection, Includes Ignition Wire With 5 Amp Fuse, Wire Ends Heat Shrink and Routed to Center of Header Console in Cab
8RME	RADIO AM/FM/WB/Clock/3MM Auxiliary Input, with Multiple Speakers, With CD Player
8THB	BACK-UP ALARM Electric, 102 dBA
8THJ	AUXILIARY HARNESS 3.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications
8TKK	TRAILER AUXILIARY FEED CIRCUIT for Electric Trailer Brake Accommodation/Air Trailer ABS; With 30 Amp Fuse and Relay, Controlled by Ignition Switch
8VAY	HORN, ELECTRIC Disc Style
8VUK	BATTERY BOX Aluminum With Plastic Cover, 18" Wide, 2, 3, or 4 Battery Capacity, Mounted Right Side Back of Cab
8WBW	JUMP START STUD Remote Mounted

Includes

<u>Code</u>	<u>Description</u>
	: JUMP START STUD Mounted to Battery Box
8WGL	WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time
8WMA	SWITCH, TOGGLE, FOR WORK LIGHT Lighted; on Instrument Panel and Wiring Effects for Customer Furnished Back of Cab Light
8WML	HEADLIGHTS Long Life Halogen; for Two Light System
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights
8WRB	HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn on if Windshield Wipers are turned on
8WTL	STARTING MOTOR {Delco Remy 39MT} 12 Volt; Gear Reduced, With Thermal Over-Crank Protection
8WVP	HORN, AIR (2) Single Tone, Rectangular; Chrome. Roof Mounted
8WWJ	INDICATOR, LOW COOLANT LEVEL With Audible Alarm
8WXB	HEADLIGHT WARNING BUZZER Sounds When Head Light Switch is on and Ignition Switch is in "Off" Position
8WXD	ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner When Vehicle Park Brake is "NOT" Set, With Ignition "OFF" and any Door Opened
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III With Trip Indicators, Replaces All Fuses Except For 5-Amp Fuses
8XGT	TURN SIGNALS, FRONT LED, Includes LED Side Marker Lights, Mounted on Fender
8XHD	BATTERY DISCONNECT SWITCH 300 Amp; Cab Mounted, Disconnects Charging Circuits; Locks with Padlock
9ANG	HOOD, HATCH (01) for Servicing
9HAN	INSULATION, UNDER HOOD for Sound Abatement
9HBM	GRILLE Stationary, Chrome
9HBN	INSULATION, SPLASH PANELS for Sound Abatement
9WBC	FRONT END Tilting, Fiberglass, With Three Piece Construction; for 2007 & 2010 Emissions
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100
	<u>Includes</u>
	: PAINT SCHEMATIC ID LETTERS "GM"
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone

<u>Code</u>	<u>Description</u>
10UAD	VEHICLE REGISTRATION IDENTITY ID for 49 States, Excluding California
10WJH	PROMOTIONAL PACKAGE Government and Municipal Silver Package; Two Year Limited Subscription of On-Command Service Information (Formerly Fleet ISIS), and On-Command Parts Information (Formerly Fleet Parts Catalog), Requires Specific Feature Combinations
11001	CLUTCH Omit Item (Clutch & Control)
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection
12851	PTO EFFECTS, ENGINE FRONT Less PTO Unit, Includes Adapter Plate on Engine Front Mounted
12NWC	ENGINE, DIESEL {Navistar N9} EPA 2010, SCR, 300 HP @ 2000 RPM, 860 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed, 300 Peak HP (MAX) <u>Includes</u> : AIR COMPRESSOR AIR SUPPLY LINE Naturally-Aspirated (Air Brake Chassis Only) : COLD STARTING EQUIPMENT Intake Manifold Electric Grid Heater with Engine ECM Control : CRUISE CONTROL Electronic; Controls Integral to Steering Wheel : ENGINE OIL DRAIN PLUG Magnetic : ENGINE SHUTDOWN Electric, Key Operated : FUEL FILTER Included with Fuel/Water Separator : FUEL/WATER SEPARATOR Fuel/Water Separator and Fuel Filter in a Single Assembly; With Water-in-Fuel Sensor; Engine Mounted : GOVERNOR Electronic : OIL FILTER, ENGINE Spin-On Type : WET TYPE CYLINDER SLEEVES
12THZ	FAN DRIVE {Horton Drivemaster Polar Extreme} Direct Drive Type, Two Speed, With Residual Torque Device for Disengaged Fan Speed <u>Includes</u> : FAN Nylon
12UCV	RADIATOR Aluminum, Cross Flow, Series System; 1228 SqIn Core and 648 SqIn Charge Air Cooler
12UPA	FEDERAL EMISSIONS {Navistar N9 & N10} EPA, OBD and GHG Certified for Calendar Year 2016
12VAL	AIR CLEANER Dual Element, with Integral Snow Valve and In-Cab Control <u>Includes</u> : GAUGE, AIR CLEANER RESTRICTION Air Cleaner Mounted
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel
12VYL	ACCESSORY WIRING, SPECIAL for Road Speed Wire Coiled Under Instrument Panel for Customer Use

<u>Code</u>	<u>Description</u>
12VYP	ENGINE CONTROL, REMOTE MOUNTED - No Provision Furnished for Remote Mounted Engine Control
12WTH	BLOCK HEATER, ENGINE {Phillips} 120 Volt/1250 Watt; With "Y" Cord From Socket in Standard Location, For a Dealer Installed Oil Pan Heater, With Extended Life Coated Metal/Plastic/Metal Material Oil Pan
	<u>Includes</u> : BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door
	<u>Notes</u> : MPM material is single sheet composite with two layers of sheet metal sandwiching plastic material. MPM material has electro-deposition prime coat with powder coating for the final finish coat.
12WZE	EMISSION COMPLIANCE Federal, Does Not Comply With California Clean Air Idle Regulations
13AVG	TRANSMISSION, AUTOMATIC {Allison 3500_RDS_P} 5th Generation Controls; Wide Ratio, 5-Speed, With Overdrive; On/Off Hwy; Includes Oil Level Sensor, With PTO Provision, Less Retarder, With 80,000-lb GVW & GCW Max.
13WAW	OIL COOLER, AUTO TRANSMISSION {Modine} Water to Oil Type
13WBL	TRANSMISSION SHIFT CONTROL {Allison} Push-Button Type; for Allison 3000 & 4000 Series Transmission
13WDT	SHIFT CONTROL PARAMETERS {Allison} 3 Speed S1 Secondary Shift Schedule for 5 or 6 Speed Allison Gen4/Gen 5 3000 & 4000 Series Transmissions
13WLP	TRANSMISSION OIL Synthetic; 29 thru 42 Pints
13WUA	AUTOMATIC NEUTRAL Allison WT Transmission Shifts to Neutral When Parking Brake is Engaged and Remains in Neutral When Parking Brake is Disengaged
13WUS	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS); General Purpose Trucks Modified for Single Input Auto Neutral
14ARB	AXLE, REAR, SINGLE {Meritor RS-23-160} Single Reduction, 23,000-lb Capacity, 200 Wheel Ends, Driver Controlled Locking Differential . Gear Ratio: 5.38
	<u>Includes</u> : REAR AXLE DRAIN PLUG (1) Magnetic, For Single Rear Axle
	<u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires. : When Specifying Axle Ratio, Check Performance Guidelines and TCAPE for Startability and Performance
14SAL	SUSPENSION, RR, SPRING, SINGLE Vari-Rate; 31,000-lb Capacity, Includes 4500-lb Capacity Multileaf Auxiliary
	<u>Notes</u>

<u>Code</u>	<u>Description</u>
	: The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.
14WMG	AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 30 thru 39.99 Pints
15DYP	DEF TANK 9.5 U.S. Gal. 36.0L Capacity, Frame Mounted Outside Left Rail, Under Cab
15LKV	FUEL/WATER SEPARATOR {Racor Model 32987} 12 Volt Electric Heater, 40 Micron/ 60GPH Filter, and Drain for Midrange Diesels, Frame Mounted, In Addition to Engine Mounted Fuel/Water Separator
15LLZ	LOCATION FUEL/WATER SEPARATOR Mounted Outside Left Rail 41" Back of Cab
15SWE	FUEL TANK Top Draw; Non-Polished Aluminum, 26" Diam., 70 U.S. Gal., 265 L Capacity Mounted Left Side, Under Cab
16030	CAB Conventional
	<u>Includes</u>
	: ARM REST (2) Molded Plastic; One Each Door
	: COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window
	: CUP HOLDERS Two Cup Holders, Located in Lower Center of Instrument Panel
	: DOME LIGHT, CAB Rectangular, Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Console, Center Mounted
	: GLASS, ALL WINDOWS Tinted
	: GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side
	: GRAB HANDLE, CAB INTERIOR (2) Front of "B" Pillar Mounted, One Each Side
	: INTERIOR SHEET METAL Upper Door (Above Window Ledge) Painted Exterior Color
	: STEP (4) Two Steps Per Door
16HBA	GAUGE CLUSTER English With English Electronic Speedometer
	<u>Includes</u>
	: GAUGE CLUSTER (6) Engine Oil Pressure (Electronic), Water Temperature (Electronic), Fuel (Electronic), Tachometer (Electronic), Voltmeter, Washer Fluid Level
	: ODOMETER DISPLAY, Miles, Trip Miles, Engine Hours, Trip Hours, Fault Code Readout
	: WARNING SYSTEM Low Fuel, Low Oil Pressure, High Engine Coolant Temp, and Low Battery Voltage (Visual and Audible)
16HGH	GAUGE, OIL TEMP, AUTO TRANS , for Allison Transmission
16HHE	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} With Black Bezel Mounted in Instrument Panel
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16HLJ	GAUGE, DEF FLUID LEVEL
16JNV	SEAT, DRIVER {National 2000} Air Suspension, High Back With Integral Headrest, Cloth, Isolator, 1 Chamber Lumbar, 2 Position Front Cushion Adjust, -3 to +14 Degree Back Angle Adjust
	<u>Includes</u>

<u>Code</u>	<u>Description</u>
	: SEAT BELT 3-Point, Lap and Shoulder Belt Type
16RPX	SEAT, PASSENGER {National} Air-Suspension, High Back With Integral Headrest, Cloth, Isolated, 1 Chamber Lumbar, 2 Position Front Cushion Adjustment, -3 to +14 Degree Seat Back Adjustment
	<u>Includes</u>
	: SEAT BELT 3-Point, Lap and Shoulder Belt Type
16SEE	GRAB HANDLE Chrome; Towel Bar Type With Anti-Slip Rubber Inserts; for Cab Entry Mounted Left Side Only at "B" Pillar
16SJX	MIRROR, CONVEX, HOOD MOUNTED (2) {Lang Mekra} Bright, Heated, Left and Right Sides 7.44" Sq
16SNC	MIRRORS (2) {Lang Mekra} Rectangular, Thermostatically Controlled Heated Heads, Bright Finish Heads, with Black Brackets and Arms, Breakaway Type, 7.55" x 14.1" Integral Convex Both Sides, 102" Inside Spacing,
16VSL	WINDSHIELD Heated, Single Piece
16WBY	ARM REST, RIGHT, DRIVER SEAT
16WBZ	ARM REST, LEFT, PASSENGER SEAT
16WCT	AIR CONDITIONER {Blend-Air} With Integral Heater & Defroster
	<u>Includes</u>
	: HEATER HOSES Premium
	: HOSE CLAMPS, HEATER HOSE Mubea Constant Tension Clamps
	: REFRIGERANT Hydrofluorocarbon HFC-134A
16WJT	INSTRUMENT PANEL Center Section, Ergonomic Panel
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature
16WKY	HVAC FRESH AIR FILTER
16WRZ	CAB INTERIOR TRIM Premium
	<u>Includes</u>
	: "A" PILLAR COVER Molded Plastic
	: CAB INTERIOR TRIM PANELS Cloth Covered Molded Plastic, Full Height; All Exposed Interior Sheet Metal is Covered Except for the Following: with a Two-Man Passenger Seat or with a Full Bench Seat the Back Panel is Completely Void of Covering
	: CAB SOUND INSULATION Includes Dash and Engine Cover Insulators
	: CAB, INTERIOR TRIM, CLOSEOUT Lower Dash Closeout Panel; Molded Plastic; Under Instrument Panel Driver Side
	: CONSOLE, OVERHEAD Molded Plastic; With Dual Storage Pockets with Retainer Nets, CB Radio Pocket, Speakers, and Reading Lights
	: COURTESY LIGHT (2) Mounted In Front Map Pocket Left and Right Side
	: DOOR TRIM PANELS with Cloth Insert on Bolster Driver and Passenger Doors
	: FLOOR COVERING Rubber, Black

<u>Code</u>	<u>Description</u>
	: GAUGE, TEMPERATURE, AMBIENT Includes Wiring and Sensor With Display Unit Mounted in Cluster
	: HEADLINER Soft Padded Cloth
	: INSTRUMENT PANEL TRIM Molded Plastic with Black Center Section
	: STORAGE POCKET, DOOR (2) Molded Plastic (Carpet Texture), Full-Length; Driver and Passenger Doors
	: SUN VISOR (3) Padded Vinyl: 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Vanity Mirror and Toll Ticket Strap, plus 1 Auxiliary Visor (Front Only), Driver Side
16WSK	CAB REAR SUSPENSION Air Bag Type
16XWD	SUNSHADE, EXTERIOR Aerodynamic, Painted Roof Color; Includes Integral Clearance/Marker Lights
16XXC	COWL TRAY LID
26DPY	WHEEL, SPARE, DISC 22.5"x8.25" Rims, Painted Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc
27DRN	WHEELS, FRONT {Accuride} DISC; 22.5"x8.25" Rims, Painted Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and Steel Hubs
	<u>Includes</u>
	: PAINT IDENTITY, FRONT WHEELS White
	<u>Notes</u>
	: Compatible Tire Sizes: 11R22.5, 12R22.5, 255/70R22.5, 255/80R22.5, 265/75R22.5, 275/70R22.5, 275/80R22.5, 295/75R22.5, 295/80R22.5
28DRN	WHEELS, REAR {Accuride} DUAL DISC; 22.5"x8.25" Rims, Painted Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and Steel Hubs
	<u>Includes</u>
	: PAINT IDENTITY, REAR WHEELS White
	<u>Notes</u>
	: Compatible Tire Sizes: 11R22.5, 12R22.5, 255/70R22.5, 255/80R22.5, 265/75R22.5, 275/70R22.5, 275/80R22.5, 295/75R22.5, 295/80R22.5
29WAR	WHEEL GUARDS, REAR {Accuride} for Metric Hub Piloted Wheels with Flanged Mounting Nuts, Mounted Between Hub & Wheel and Between Dual Wheels
60AAG	BDY INTG, REMOTE POWER MODULE Mounted Inside Cab behind Driver Seat; Up to 6 Outputs & 6 Inputs, Max. 20 amp. per Channel, Max. 80 amp Total (Includes 1 Switch Pack With Latched Switches)
7382158105	(4) TIRE, REAR 12R22.5 G282 MSD (GOODYEAR) 481 rev/mile, load range H, 16 ply
7382158107	(2) TIRE, FRONT 12R22.5 G661 HSA (GOODYEAR) 484 rev/mile, load range H, 16 ply

Services Section:

Code
40115**Description**
WARRANTY Standard for WorkStar 7300/7400 (4x2, 4x4, 6x4, 6x6), Effective with
Vehicles Built January 2, 2015 or Later, CTS-2002U

Spare wheel

INTERNATIONAL®

Trade Information
2017 7400 SFA 4X2 (SA525)

April 07, 2016

(US DOLLAR)

Description

Price

2001 Freightliner FL 80 Plow truck with front and wing plow , as viewed and
appraised on 3/25/2016

12000.00

Total Trade Allowance: \$12,000.00

INTERNATIONAL®

Financial Summary
2017 7400 SFA 4X2 (SA525)

April 07, 2016

(US DOLLAR)

Description

Price

Net Sales Price:

\$77,300.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name


Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without Seller's Authorized Signature

Official Title and Date

The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.

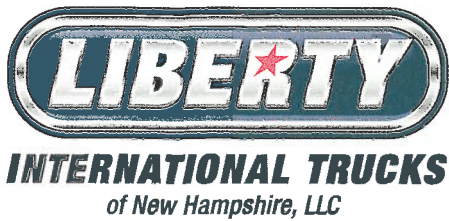

April 8 2016

Town of Pelham

Highway Department

Extended warranty options :

60 Month/Unlimited miles Allison \$450.00

74 Month/150,000 miles/5,400 hours – extended engine, engine electronics, including injectors , 100% P & L \$3,000.00

72 month/150,000 miles extended basic warranty, \$2,870.00

60 month / unlimited miles Towing warranty (72 month Not Available) \$800.00

Liberty International Trucks of NH

Jim Ramsay